

PR95-PSM

Multifunction Peripheral



The ultimate multifunctional transactional printer, integrated with Document, ID and MICR Scanner

The PR95-PSM is a **specialised multifunction peripheral for bank front offices**. With its ultra-compact dimensions and extensive range of functions, PR95-PSM simplifies front-office installations and supports new applications.


The printer is **ideal for document management solutions**, enabling text and image acquisition directly by the cashier. Functions such as optical character recognition and magnetic code line recognition, are just two of the many options available.

PR95-PSM is compatible with the applications currently implemented on the PR2, Olivetti's highly successful bank printer.



Main Characteristics

- > A4 duplex scanner, B/W, greyscale and colours up to 600 dpi
- > E13B and CMC7 magnetic code line reader
- > 24-dot matrix printer auto-border and auto-alignment
- > Three-port USB 2.0 hub, including a front-facing port
- > Operator display for machine and application messages

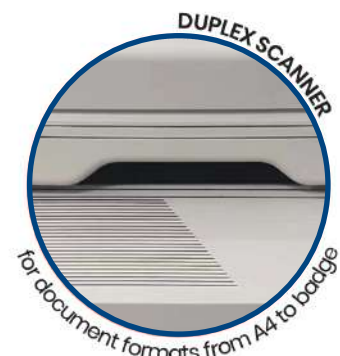

Let's get in touch!
info@globalis.com

Headquarters &
Americas Operations

www.globalis.com

Middle East, Africa
& Asia Operations

www.alistech.ae

Technical Specifications PR95-PSM

General Characteristics

MICR

Recognized fonts: CMC7, E13B

Speed: >30cps (CMC7) or >18cps (E13B)

HUB

Type: USB 2.0

Ports: 1 frontal and 2 rear

Interfaces Standard:

RS232 serial,
IEEE 1284 parallel and USB 2.0

Noise level

< 54 dBA

(ISO 7779 printing ECMA 132 text)

Power consumption

Min. 6,8 W

Max. 85 W (printing)

Voltage

230V / 50Hz

115V / 60Hz

Certifications

CE, TÜV NRTL,
FCC class A verified

Dimensions (WxDxH)

384 x 296 x 204 mm
(15.12" x 11.65" x 8.03")

Weight 10.5 Kg

Options

UV light

Enable scans of security features

Printer

Technology

24-pin dot matrix

Resolution

240 x 360 dpi

Fonts

OCR A-B, Roman, Sans Serif, Italic, Courier

Pitch

10, 12, 15, 16.6, 17,1 cpi

Printing speed at 10 cpi

VHSD: 660 cps **NLQ:** 200 cps

HSD: 520 cps **LQ:** 135 cps

Draft: 400 cps **BIM:** 2000 dps

Line length

238,76 mm

(94 columns at 10 cpi)

Line spacing

1/5", 1/6", n/216", n/240"

Copies

Original + 6 copies

Emulations

Olivetti Standard,

IBM PP & X24

Optional: WINCOR 4915

Document handling

- Feed width: 245 mm

- Completely flat paper bed

- Automatic insertion with autoborder

- Automatic document-thickness adaptation

Ribbon cartridge

4 million or 10 million characters

Scanner

Technology

Contact image sensor,
flat bed

Resolution

600 / 300 / 200 dpi

Acquisition

One pass, front and rear

Colours

RGB 24 bit / 256 greys /
16 greys / BW

Other functions

- TWAIN driver

- JPEG compression

- Filtering, rotation

- Multiple windows selections (up to 9)

Scanning speed

Max 10 inch/s (greyscale)

Full colours 3.3 inch/s

Document format

Image width up to 210 mm

Width: 65÷245 mm

Length: 70÷330 mm

Thickness: 0.08÷1.8 mm

Rigid documents

Unembossed credit and ID cards



Let's get in touch!

info@globalis.com

Headquarters &
Americas Operations

www.globalis.com

Middle East, Africa
& Asia Operations

www.alistech.ae